

# PowerStab™ 7794


*New Materials Creating New Performances*

**Quality Products.  
Dependable Service.**

## CHEMICAL NAME

Bis(2,2,6,6,-tetramethyl-4-piperidiny) decanedioate and  
N,N'-bis(2,2,6,6-Tetramethyl-4-piperidiny)-1,6-hexanediamine, polymer with  
2,4,6-trichloro-1,3,5-triazine and 2,4,4- trimethyl-1,2-pentanamine

## CHEMICAL STRUCTURE

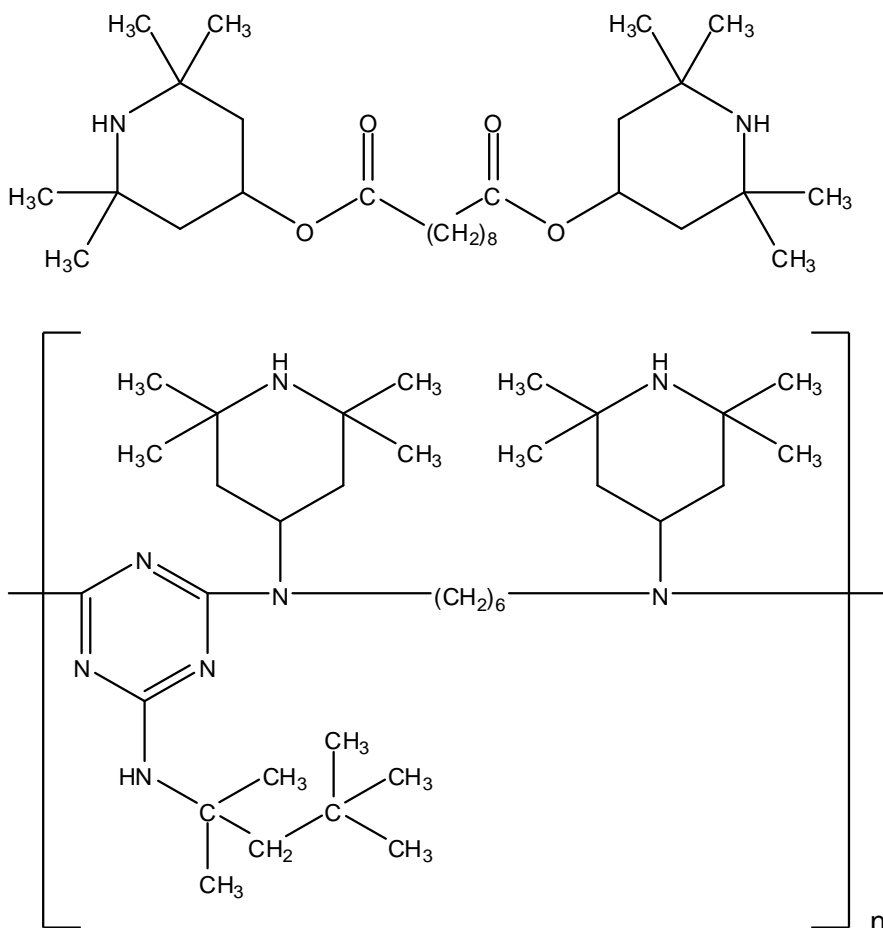

## INTRODUCTION

PowerStab™ 7794 is a synergistic blend of PowerStab™ 770 (LMWH) and PowerStab™

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing. We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.

Copyright©TinToll Performance Materials Co., Ltd. [www.TinToll.com](http://www.TinToll.com).



# PowerStab™ 7794

*New Materials Creating New Performances*

**Quality Products.  
Dependable Service.**

944 (HMWH).

## PHYSICAL PROPERTIES

CAS No.	52829-07-9, 70624-18-9
EC No.	258-207-9, n.a.
Molecular Formula	$C_{28}H_{52}O_4N_2, (C_{35}H_{68}N_8)_n$
Molecular Weight	2000-3000
Melting Point(°C)	60-120
Specific Gravity <sub>[20°C]</sub>	0.01
Vapor Pressure <sub>[20°C, Pa]</sub>	Max.0.01
Volatiles(%)	Max.0.8
Color of solution 425nm (%)	93
Color of solution 500nm (%)	97
Appearance	White to Off-white Powder
Ash(%)	Max.0.1
Solubility (20°C)	% w/w
Acetone	>20
Dichloromethane	>30
Styrene	>30
Water	<0.1

## APPLICATIONS

PowerStab™ 7794 is especially suitable for the protection of polyolefins such as PP, PE, PP/EPDM and PP/PE/EPDM blends from the damage of UV radiation. Due to its synergistic effect, it is extremely good for thick applications where the efficacy and long term protection are needed to be considered at the same time.

PowerStab™ 7794 can also be used in styrenic polymers, e.g. ABS, impact polystyrene, etc.

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing. We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.  
Copyright©TinToll Performance Materials Co., Ltd. [www.TinToll.com](http://www.TinToll.com).



# PowerStab™ 7794

*New Materials Creating New Performances*

**Quality Products.  
Dependable Service.**

## HANDLING AND STORAGE

In accordance with good industrial practice, handle with care and avoid unnecessary personal contact. Avoid continuous or repetitive breathing of dust. Use only with adequate ventilation. Protect skin. Avoid dust formation and ignition sources.

This product may be stored up to one year in a sealed container. Containers should be stored in a cool, dry area. Extended storage at elevated temperatures or exposure to direct heat or sunlight could reduce product life. Keep containers sealed when not in use.

For more detailed information please refer to the material safety data sheet.

## PACKING

PowerStab™ 7794 is supplied in net weight 25kg fiber drum with PE liner.

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing. We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.  
Copyright©TinToll Performance Materials Co., Ltd. [www.TinToll.com](http://www.TinToll.com).

